



The state of the art Triton 301 is designed to give top performance and achieve high levels of efficiency thanks to optimised hydraulic systems and motors. The pump is fitted with a magnetic float switch with variable level control and maximum travel stop. Supplied free standing for quick installation.

APPLICATION

- Factories and warehouses
- Housing developments
- Commercial buildings
- Retail and leisure
- Domestic properties

SUITABLE FOR

- Ground water
- Surface water
- Storm water
- Grey water


IMPELLOR TYPE

- Vortex

KEY FEATURES

- Pump and discharge casings in GRP. Casing cover and impellor in noryl. Motor housing and shaft in nickel steel. Float switch in polypropelene
- Vortex hydraulics for blockage free pumping in critical applications
- Single Phase (240V) only
- Internal thermal protection
- Suitable for ground, surface, storm and grey water applications

PUMP CURVE

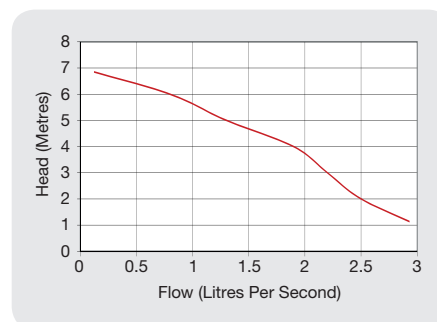

DIMENSIONS

Triton 301	
Height	270mm
Width	225mm (inc. float)
Length	280mm (inc. float)

TECHNICAL SPECIFICATIONS

Triton 301	Single Phase
Power Supply	230V AC
Rated Current	1.5A
Motor Rating	340W
Frequency	50Hz
Revolutions Per Minute	2800rpm
Max. Vertical Output	6.8m
Max. Flow Rate	174l/min
Max. Liquid Temperature	<40°C
Discharge Size	1¼"
Free Passage	10mm
Cable Length	10m
Weight	5.2kg
Colour	Green / Black
Impellor Type	Vortex
Control	Automatic

The company reserve the right to make alterations in the interest of technical development.



Triton Systems

Units 3 – 5 Crayford Commercial Centre, Greyhound Way, Crayford, Kent DA1 4HF
 Tel 01322 318830 Fax 01322 524017 Email info@tritonsystems.co.uk

Supplied in conjunction with Edincare Pumps

