



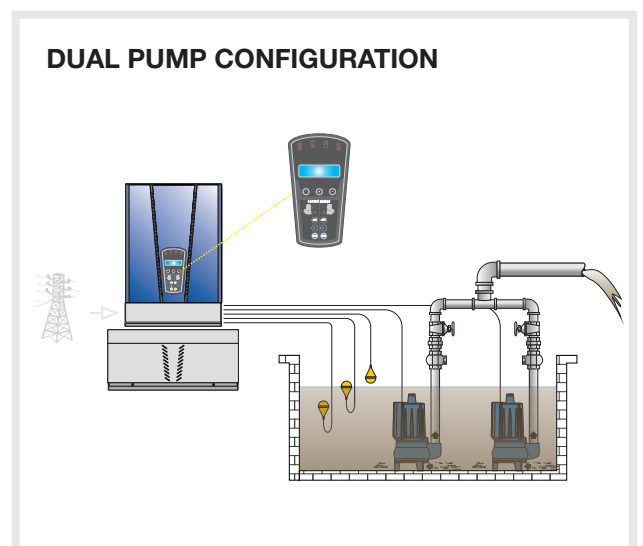

The PowerSafe range of fully automatic battery back up systems are designed to offer your customer peace of mind for their basement drainage. The system can be used on single or dual pump configurations and is suitable for both groundwater and foul waste. It comes complete with a built in GSM telemetry for complete monitoring of your pumped drainage system.


The PowerSafe is suitable for installing either at the initial building stage, or retrofitting to existing buildings. The system comprises of a PowerSafe control panel, cable cover, battery holder and batteries (no. of batteries to be specified at time of order).

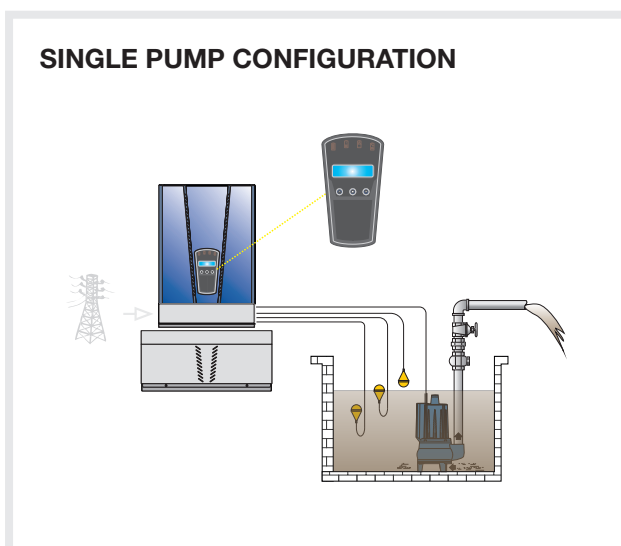

TECHNICAL FEATURES

- Hand/Off/Auto switches
- High Level Audible Alarm with Mute Button
- Duty/Assist Configuration (Alternates switching of pumps)
- Visual Indication for: (Supply On, Pumps Running, Pumps Tripped & HL)
- Available in both single & dual pump configuration.
- Single-phase power supply 230V
- Automatic battery charger
- LCD backlit display
- Hour run meter
- No. Start meter
- Overload protection
- Reporting of scheduled maintenance
- Automatic load TEST
- General alarm output
- Removable front door
- Steel box painted with powder, protection IP31
- Integral telemetric GSM module

DIMENSIONS

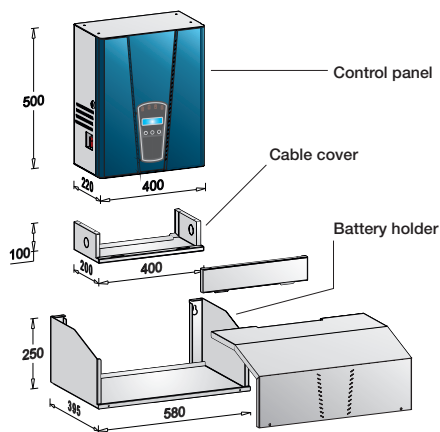

The company reserves the right to make any alterations in the interest of technical development.

SPECIFICATIONS

PowerSafe 900

With sealed batteries (up to 450W, 3.1A)
Pump Type: 301 (Single pump configuration)

Code	Model	Endurance	Holder	Kg
37004	PowerSafe 900.S	1 h	1	51
37005	PowerSafe 900.S	2 h	1	55
37006	PowerSafe 900.S	3 h	1	75
37007	PowerSafe 900.S	4 h	2	101

PowerSafe 1300

With sealed batteries (up to 600W, 4.8A)
Pump Type: 303 (Single pump configuration)

Code	Model	Endurance	Holder	Kg
37008	PowerSafe 1300.S	1 h	1	60
37009	PowerSafe 1300.S	2 h	1	76
37010	PowerSafe 1300.S	3 h	1	102
37011	PowerSafe 1300.S	4 h	2	134

PowerSafe 1700

With sealed batteries (up to 750W, 6.1A)
Pump Type: RS55 (Single pump configuration)

Code	Model	Endurance	Holder	Kg
37012	PowerSafe 1700.S	1 h	1	81
37013	PowerSafe 1700.S	2 h	1	107
37014	PowerSafe 1700.S	3 h	1	139
37015	PowerSafe 1700.S	4 h	2	186

Also available in dual pump configuration. Please contact Triton Systems for further information.



Triton Systems

Units 3 – 5 Crayford Commercial Centre, Greyhound Way, Crayford, Kent DA1 4HF

Tel 01322 318830 Fax 01322 524017 Email info@tritonsystems.co.uk

Supplied in conjunction with Edincare Pumps

